

A high-efficiency out-of-plane fibre coupler for coupling to high index contrast waveguides

Dirk Taillaert (1), Wim Bogaerts (1), Peter Bienstman (1), Thomas F. Krauss (2),
Ingrid Moerman (1), Peter Van Daele (1), Roel Baets (1)

(1) Dept. of Information Technology (INTEC), Ghent University – IMEC
Sint-Pietersnieuwstraat 41, 9000 Gent, Belgium
(dirk.taillaert@intec.rug.ac.be)

(2) School of Physics and Astronomy, St. Andrews University, St. Andrews KY16 9SS, Scotland

Abstract: We describe a novel type of grating coupler for butt-coupling between single-mode fibre and integrated ultra-compact waveguides. We have measured 19% coupling efficiency from a fibre to a 240nm thin GaAs/Al_{0.94}Ga_{0.06}As high index contrast waveguide.

Introduction

Future large scale photonic integrated circuits will probably use ultra-compact waveguides (e.g. photonic crystal waveguides). One of the major problems to be solved is the interface from the ultra-compact waveguide to the outside world. Coupling to a standard single mode fibre using edge-coupling is a daunting task, because of the small dimensions of the waveguides (which are typically an order of magnitude smaller than conventional integrated optical waveguides). We propose the use of a grating coupler to butt-couple light from a single mode fibre, perpendicular to the surface, into planar waveguides, as shown in figure 1.

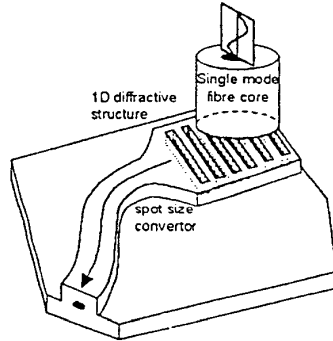


Figure 1: sketch of fibre coupler principle

This coupling scheme allows dense integration and wafer scale testing because there is no need to cleave the devices. For this coupling scheme to work two problems have to be solved. The light has to make a 90° turn from the fibre to the waveguide and a broad (approximately 10µm wide) waveguide has to be tapered into a small waveguide, preferably over a short distance. An adiabatic taper can be used as a horizontal spot-size converter, but a more compact solution is obviously preferred. In this work we have only considered the 90° bending issue.

Several grating couplers have been demonstrated that couple light out of [1,2] or into [3] waveguides. These couplers achieve high efficiencies (>50%) but have a very narrow bandwidth and they use relatively long (>100µm), shallow gratings

In our design the grating is much shorter (approximately 10µm) to be able to butt-couple to fibre. Therefore the grating has to provide strong coupling and has to be etched relatively deeply. This also means a rigorous electromagnetic method instead of perturbation theory is used to design these structures. To optimize the design, we used eigenmode expansion with perfectly matched layer boundaries [4]. The coupler is based on a so-called second order grating [5], where the first order diffraction is useful to couple out-of-plane. Simulation results show that 20% coupling efficiency can be achieved with a second order grating. By adding a first order grating reflector behind the coupler grating this can be improved to 37%. With the addition of a DBR under the waveguide, the theoretical efficiency can be as high as 74% [6]. Figure 2 shows a schematic cross-section of the structure. Wavelength is 1.55µm and all results are for TE polarisation. Details of the grating design are described elsewhere [6].

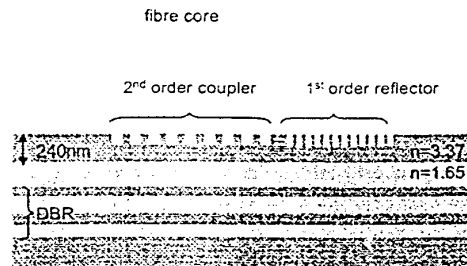


Figure 2: cross section

Experimental results

Devices were fabricated in AlGaAs-GaAs material grown by MOVPE on GaAs substrate. The waveguide layer structure consisted of a 240nm thick GaAs core with Al_{0.94}Ga_{0.06}As cladding and a 2 pair DBR under the waveguide (240nm GaAs core/290nm Al_{0.94}Ga_{0.06}As cladding/115nm GaAs/240nm Al_{0.94}Ga_{0.06}As/115nm GaAs/240nm Al_{0.94}Ga_{0.06}As). The gratings were fabricated using electron-beam lithography and reactive ion etching. Afterwards ridge waveguides were defined using optical lithography and etching. A last step was the etching of oxidation trenches and wet thermal oxidation of the

AlGaAs layers to obtain an oxide cladding. We use GaAs/Al_xO_y because it has a similar refractive index contrast as silicon on insulator. SOI is a promising candidate for large-scale photonic IC's. A top view of the grating in fig.3 shows the two different gratings.

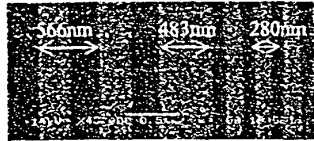


Figure 3: detail of grating (SEM top view)

For the measurements we use a widely tunable laser source with 1mW output power and polarisation maintaining output fibre. The light is coupled from the pmf-fibre via the grating into the waveguides. The output light from a cleaved waveguide facet is imaged onto a detector or power meter. During initial alignment we use an IR-camera to monitor the waveguide spot. The output power, divided by input power, as a function of wavelength for a 10 μ m wide ridge waveguide is shown in figure 4.

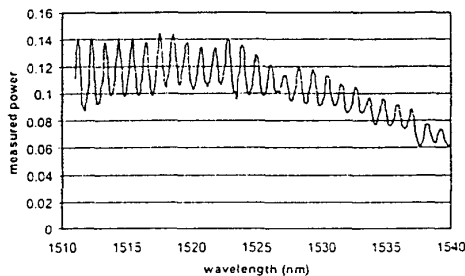


Figure 4: measurement result : P_{out}/P_{in} vs. wavelength

We measure maximum efficiency in the 1510-1525nm range. (Unfortunately we are not able to measure at shorter wavelengths because of the limitation of the tuning range of our laser). The peaks in the measurements are similar to Fabry-Perot fringes and are caused by a cavity formed by the grating and a cleaved facet. The spacing between the peaks depends on the cavity length (300 μ m in this case). To estimate the actual coupling efficiency from fibre to waveguide, we must take into account these cavity effects. When neglecting the waveguide propagation losses the two parameters that determine the cavity are the facet reflection, and the grating reflection. We have calculated the normalized transmission $P_{out}/(P_{out} \cdot \text{efficiency})$ for a facet reflection of 0.36 and different grating reflections (figure 5). The grating reflection can be estimated from P_{max}/P_{min} and the solid line from figure 5 fits to the measurements. With these values the FP-peaks are 75% of the power that would be measured without any reflection at the cleaved facet. Therefore we estimate the actual coupling efficiency to be 19% ($=0.14 \cdot 0.75$).

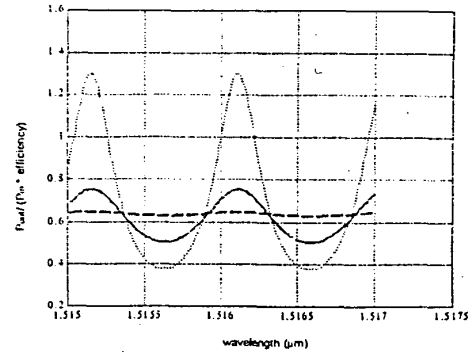


Figure 5: calculation of normalized cavity transmission for different grating reflections

The lateral alignment tolerances are shown in figure 6. The two curves are for fibre misalignment in one direction (dx for $z=0$ and dz for $x=0$, y is the fibre axis, x is parallel to the grating grooves).

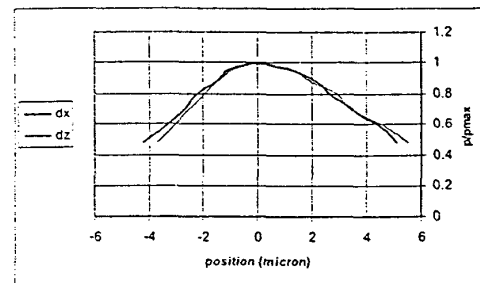


Figure 6 : lateral alignment tolerances

Conclusion

We have demonstrated 19% coupling efficiency from a vertical single-mode fibre to a 240nm thick GaAs/Al_xO_y waveguide. This fibre coupler is a promising approach to solve the coupling problem to ultra-compact waveguides.

Acknowledgement

Part of this work is supported by the European Union in the context of the IST project PICCO. The authors gratefully acknowledge technical support by the nanoelectronics research centre at Glasgow University

References

1. Eriksson et al., IEEE JQE vol. 32 (6), 1996, p1038-1047
2. Mekis et al., Optics Lett., vol. 25 (13), 2000, p942-944
3. Josey et al. IEEE PTL vol. 12 (1), 2000, p59-61
4. Bienstman et al. OQE, vol. 33 (4-5), 2001, p327-341
5. Hardy et al., IEEE JQE, vol. 25, 1989, p2096-2105
6. Taillaert et al., submitted to IEEE JQE, 2001