Electrically Injected Thin-film InGaAsP Microdisk Lasers Integrated on a Si-wafer

J. Van Campenhout¹, P. Rojo-Romeo², D. Van Thourhout¹, C. Seassal², P. Regreny², L. Di Cioccio³, J.M. Fedeli³, and R. Baets¹

We report on electrically pumped lasing in a microdisk cavity defined in an InGaAsP-based thin film bonded on top of a silicon wafer. The top metal contact is placed in the centre of the disk, whereas the bottom contacting is done by means of a thin lateral contacting layer. In order to avoid large optical absorption in p-type contact layers, a tunnel junction was used in combination with two n-type contacts. Lasing was observed in pulsed regime with a current threshold as low as 0.55mA, for microdisks with a diameter of $6\mu m$.

Introduction

Microdisk lasers have attracted a lot of interest lately, mostly due to their potential role as very compact light sources with low power consumption in large scale photonic integrated circuits. Several authors have reported electrically injected lasing in microdisk structures supported by a pedestal, some with lasing thresholds well below 100μA [1]-[3]. Our work focuses on the integration of these III-V microdisk

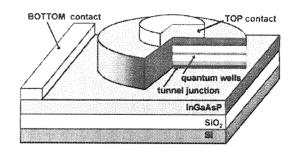


Figure 1. Microdisk laser design

lasers on a Si platform. This approach not only facilitates integration with silicon electronics but also with silicon photonics. Indeed, because of the transparency of Si at the telecommunications wavelengths, and the fact that CMOS technology can be used in the fabrication of photonic components in Silicon-on-Insulator (SOI) [4], silicon has emerged as a promising platform for photonic functions. In our approach, integration of compact active optoelectronic components on a silicon platform is done by bonding a thin III-V film on top of it. Optically pumped lasing in microdisk lasers integrated on a Si-wafer and their optical coupling to an underlying SOI-waveguide has already been demonstrated [5]. In this paper we report on electrically pumped devices.

Design aspects

An important design aspect of electrically injected, thin-film laser devices is the epilayer heterostructure composition: this should allow efficient carrier injection while preserving optical resonance quality (see figure 1). An important issue is how to contact

Ghent University-IMEC, Department of Information Technology- Sint-Pietersnieuwstraat 41, 9000 Gent, Belgium Laboratoire d'Electronique, Microelectronique et Micro-systèmes, Ecole Centrale de Lyon, 36 Avenue Guy de Collongue, 69134 Ecully cedex-France

CEA-DRT/LETI, 17 Rue des Martyrs, 38054 Grenoble cedex 9-France.

c-mail: joris.vancampenhout@intec.ugent.be

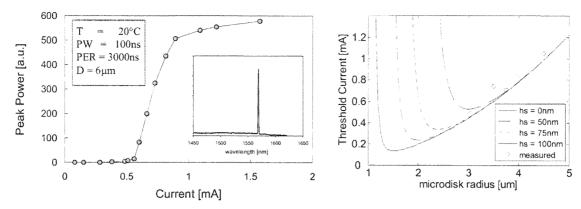


Figure 2. Left: light output vs. current for $D=6\mu m$, inset: lasing spectrum for I=0.75mA. Right: calculated threshold current versus disk diameter D and bottom contact slab thickness h. Circles denote measured values.

		various disco ile ci		Carculations
er	Value	Parameter	Value	Parameter

Table 1 Decempter values used in threshold surrent calculations

Parameter	Value	Parameter	Value	Parameter	Value
A	10^8 s^{-1}	G_0	1500 cm ⁻¹	aint	35cm ⁻¹
В	$2 \ 10^{-10} \text{cm}^{-3} \text{s}^{-1}$	n_0	1.5 10 ¹⁸ cm ⁻³	\(\Omega_{\text{scatter}}\)	5cm ⁻¹
C	$1.6 \ 10^{-28} \text{cm}^{-6} \text{s}^{-1}$	Г	0.068		
η_i	0.7	d _{QW}	18nm	Accompany	

the p-type layer of the pn-junction. In classic substrate lasers, this is done by means of a highly doped, low-bandgap semiconductor layer. However, these layers are very absorptive and thus not useable in a thin membrane. Therefore, we implemented a tunnel junction, in combination with a second n-type contact. This tunnel junction consists of a reverse-biased Q1.2 p++/n++-junction with layer thicknesses of only 20nm and doping levels above 10¹⁹cm⁻³. This type of tunnel junction can have low absorption losses in combination with a low electrical resistivity [6]. We calculated an internal loss of 35/cm, mostly due to free carrier absorption in the tunnel junction. A second important aspect is the position of the metal contacts. They should be kept away form the optical field to avoid any excess absorption. In our design, the top contact is placed only in the centre of the microdisk, whereas the bottom contact is placed on a very thin n-type InP layer that extends laterally at the bottom of the microdisk. The bend losses of the microdisk resonator are highly dependent on this bottom contact layer thickness h_s . FDTD simulations show that for disk diameters D smaller than $6\mu m$, h_s should be smaller than 100nm. For $h_s = 50$ nm, disk diameters can be even as small as 4µm. The threshold current was calculated as function of these two design parameters, assuming logarithmic gain and (material) parameter values given in table 1. Results are shown in figure 2.

Fabrication and measurement Results

First, the laser heterostructure including three compressively strained InAsP quantum wells and the tunnel junction was grown by molecular beam epitaxy (MBE) on a 2 inch InP wafer. This wafer was bonded onto a Si wafer by molecular bonding (for more details, see [5]). After substrate removal, the microdisks were defined by optical lithography and were etched into the 420nm-thick bonded membrane by reactive ion

etching (RIE) using a Ti hard mask. The RIE etch was incomplete, leaving a thin bottom contact membrane of about 80nm. These structures were covered with a benzocyclobutene (BCB) film, in which contact windows were etched before depositing the top and bottom metal contact. Au-based contacts were deposited and fast-alloyed at 400°C.

Electrically injected lasing was observed for microdisks with diameters in the range 6-9um. The P-I curve and lasing spectrum for a disk with diameter of 6um is depicted in fig. 2 and reveals a threshold current as low as 0.55mA, and a lasing wavelength of 1570nm. For all diameters, the microdisks lase only in the radially fundamental whispering gallery modes, due to the presence of the top metal contact in the centre of the disk. For smaller top metal contacts, we also observed lasing for radially higher order modes. The current threshold as a function of diameter is also depicted in fig 2: for disk diameters smaller than 6µm, we failed to open the top contact window in the BCB-layer. However, calculated threshold current values indicate that we could reduce the threshold down to 0.25mA by reducing the diameter to 4µm. Lasing was only obtained in pulsed regime, due to the high electrical resistance of the device in combination with a poor heat sinking ability. Indeed, the voltage drop at threshold varies between 5-7V, mainly due to the non-optimal tunnel junction and non-optimal ntype metal contacts. A thermal analysis of the microdisk laser yields a thermal resistance of about 10^4 K/W for $D = 6\mu m$, what results in serious self heating. Future work includes coupling to a passive SOI-waveguide and improvement of the tunnel junction, metal contacts and etching quality.

Acknowledgements

The work of J. Van Campenhout was supported by the Research Foundation – Flanders (FWO-Vlaanderen). Part of this work was performed in the context of the EU-funded project PICMOS.

References

- [1] T. Baba, M. Fujita, A. Sakai, M. Kihara, and R. Watanabe, "Lasing characteristics of GaInAsP-InP strained quantum-well microdisk injection lasers with diameter of 2-10µm," Photon Tech Lett., vol. 9, no. 7, pp. 878–880, 1997.
- [2] R. Ushigome, M. Fujita, A. Sakai, T. Baba, and Y. K. Kubun, "GaInAsP microdisk injection laser with benzocyclobutene polymer cladding and its athermal effect," Jpn J Appl Phys, vol. 41, no. 11A, pp. 6364–6369, 2002.
- [3] M. Fujita, R. Ushigome, and T. Baba, "Continuous wave lasing in GaInAsP microdisk injection laser with threshold current of 40 uA," Electron Lett, vol. 36, no. 9, pp. 790–791, 2000.
- [4] W. Bogaerts, R. Baets, P. Dumon, V. Wiaux, S. Beckx, D.Taillaert, B. Luyssaert, J. Van Campenhout, P. Bienstman and D. Van Thourhout, "Nanophotonic waveguides in silicon-on-insulator fabricated with CMOS technology", Journ. of Lightwave Technology, Vol. 23(1), pp. 401 412, Jan 2005
- [5] H. T. Hattori, C. Seassal, E. Touraille, P. Rojo-Romeo, X. Letartre, G. Hollinger, P. Viktorovitch, L. Di Cioccio, M. Zussy, L. El Melhaoui, and J. M. Fedeli, "Heterogeneous integration of microdisk lasers on silicon strip waveguides for optical interconnects," Photon Tech Lett, vol. 18, no. 1-4, pp. 223–225, 2006.
- [6] J. Boucart, C. Starck, F. Gaborit, A. Plais, N. Bouché, E. Derouin, J. C. Remy, J. Bonnet-Gamard, L. Goldstein, C. Fortin, D. Carpentier, P. Salet, F. Brillouet, and J. Jacquet, "Metamorphic DBR and Tunnel-Junction Injection: A CW RT Monolithic Long-Wavelength VCSEL", Journ. Sel. Top. Quant. Elec., Vol. 5(3), pp. 520 529, May 1999

Electrically Injected Thin-film InGaAsP Microdisk Lasers Integrated on a Si-wafer



Annual Symposium of the IEEE LEOS Benelux Chapter

Supported by




















A.M.J. Koonen, X.J.M. Leijtens, H.P.A. van den Boom, E.J.M. Verdurmen, J. Molina Vázquez

November 30 December 1 2006

COBRA Institute

Eindhoven University of Technology

The Netherlands

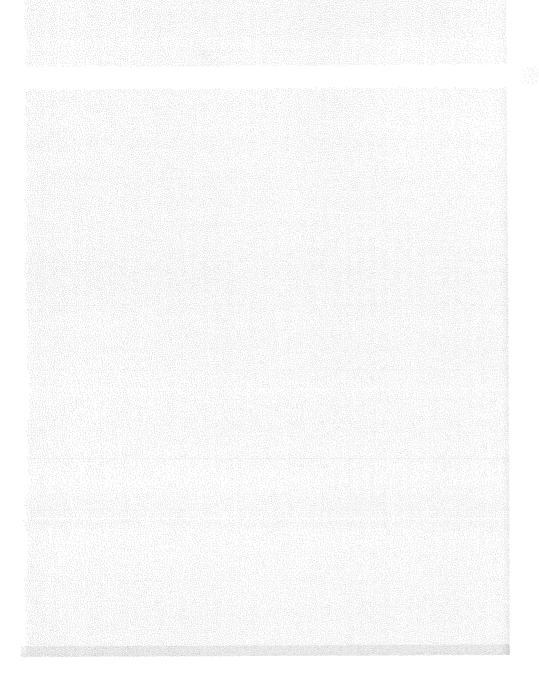

ISBN: 90-6144-989-8

Eindhoven University of Technology

Department of Electrical Engineering

Division of Telecommunication Technology and Electromagnetics

http://tta.ale.tua.nl